
PIERCE COUNTY COURTHOUSE COUNTY-CITY BUILDING - 1ST FLOOR DOOR WIDENING

930 TACOMA AVE
TACOMA, WA 98402
PERMIT SET - 6.5.2025

VICINITY MAP

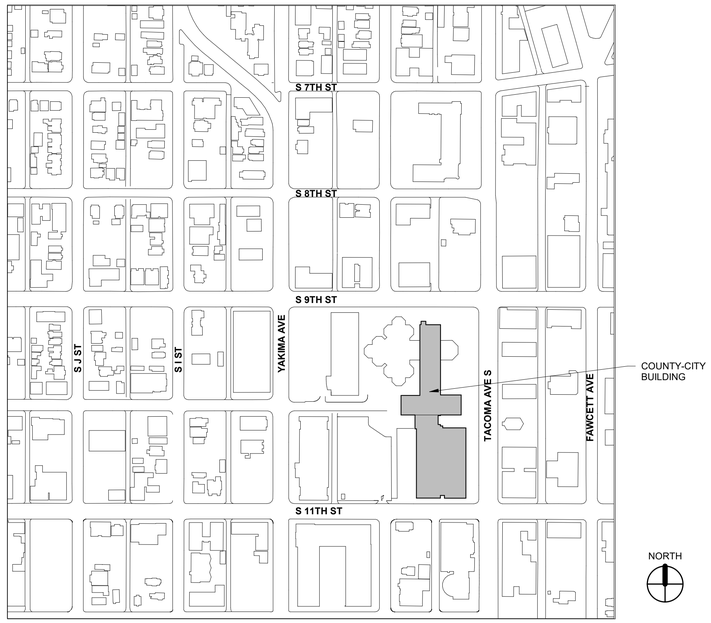

PROJECT GENERAL NOTES

1. EXISTING DIMENSIONS AND CONDITIONS:
   A. PRIOR TO START OF WORK, FIELD VERIFY EXISTING CONDITIONS AND NOTIFY THE OWNER/ARCHITECT OF ANY DISCREPANCIES FROM CONDITIONS SHOWN ON THE DRAWINGS.
2. COORDINATION AND PROTECTION OF EXISTING COMPONENTS:
   A. PROTECTION OF EXISTING BUILDING: PROTECT EXISTING BUILDING FROM DAMAGE, INCLUDING (BUT NOT LIMITED TO) WALLS, SOFFITS, SOFFIT VENTS, WINDOWS, ROOF DECK AND STRUCTURE, FASCIAS, AND PLUMBING VENTS. THE CONTRACTOR IS RESPONSIBLE FOR REPLACEMENT OF ANY BUILDING ELEMENT DAMAGED BY THE WORK OF THIS PROJECT TO MATCH EXISTING AND TO THE OWNER'S SATISFACTION.
1. INSPECTION OF EXISTING CONSTRUCTION:
   A. INSPECT THE EXISTING MATERIALS AND ELEMENTS SHOWN TO BE REUSED FOR DETERIORATION, DAMAGE OR IMPROPER INSTALLATION OF ANY KIND, AND IF FOUND, ADVISE THE OWNER IMMEDIATELY OF THE LOCATION, QUANTITY AND COST TO REPAIR AND/OR REPLACE.

SHEET INDEX

SHEET NUMBER	DRAWING DESCRIPTION
GENERAL	
G-101	INDEX SHEET, PROJECT INFORMATION, PROJECT TEAM
G-102	CODE ANAYLSIS
ARCHITECTURAL	
AD121	DEMOLITION FLOOR PLAN & DEMOLITION REFLECTED CEILING PLAN
A-121	FIRST FLOOR PLAN, FIRST FLOOR REFLECTED CEILING PLAN
A-211	INTERIOR ELEVATIONS, RELITE SCHEDULE, DETAILS
A-591	DETAILS

PROJECT INFORMATION

SITE ADDRESS	COUNTY CITY BUILDING 1ST FLOOR LOBBY AREA 930 TACOMA AVE., TACOMA, WA 98402
PARCEL NUMBERS	2009120010
ZONING	DMU, DOWNTOWN MIXED USE
PROJECT SITE AREA	8.898 ACRES / 387,596 SQUARE FEET
SCOPE OF WORK	WIDEN EXISTING INTERIOR DOOR OPENING AT 1ST FLOOR LOBBY, ADD RELITE IN EXISTING INTERIOR WALL.
UTILITY PURVEYORS	SEWER — CITY OF TACOMA WATER — CITY OF TACOMA ELECTRIC — CITY OF TACOMA
PROJECT SITE ACCESS	SOUTH: EXISTING PAVED ENTRY FROM SOUTH 11TH STREET

ABBREVIATIONS

AFF	ABOVE FINISHED FLOOR	MIN	MINIMUM
CG	CORNER GUARD	OC	ON CENTER
(E)	EXISTING	OFCI	OWNER FURNISHED, CONTRACTOR INSTALLED
EQ	EQUAL	OPP	OPPOSITE
FV	FIELD VERIFY	PAF	POWDER ACTUATED FASTENER
GA	GAUGE	SIM	SIMILAR
GWB	GYPSUM BOARD	TYP	TYPICAL
MAX	MAXIMUM	UNO	UNLESS NOTED OTHERWISE

PROJECT TEAM

OWNER
PIERCE COUNTY FACILITIES MANAGEMENT
1501 MARKET SUITE 450
TACOMA, WA 98402

CONTACT: COURTNEY MARSHALL
EMAIL: COURTNEY.MARSHALL@PIERCECOUNTYWA.GOV
PHONE: 253.344.3948

CONTACT: NICK HOLT
EMAIL: NICK.HOLT@PIERCECOUNTYWA.GOV
PHONE: 253.281.2274


ARCHITECT
BCRA, INC
2106 PACIFIC AVENUE, SUITE 300
TACOMA, WA 98402

CONTACT: KIM DOYLE
EMAIL: KDOYLE@BCRADESIGN.COM
PHONE: 253.627.4367

STRUCTURAL ENGINEER
PCS STRUCTURAL SOLUTIONS
1250 PACIFIC AVENUE, SUITE 701
TACOMA, WA 98402

CONTACT: WES NEELY
EMAIL: WNEELEY@PCS-STRUCTURAL.COM
PHONE: 253.383.2797

ARCHITECTURAL SYMBOLS

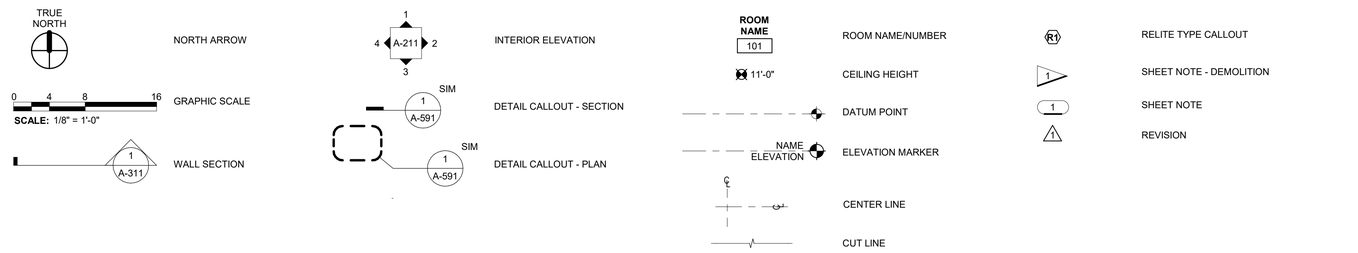

bcra
T 253.627.4367 F 253.627.4385 WWW.BCRADESIGN.COM
2106 PACIFIC AVENUE, SUITE 300, TACOMA, WA 98402

SEAL
9463 REGISTERED ARCHITECT
JOSEPH PATRICK RYDMAN
STATE OF WASHINGTON

PROJECT
PIERCE COUNTY DEPARTMENT OF FACILITIES MANAGEMENT
COUNTY-CITY BUILDING
1ST FLOOR DOOR WIDENING
COUNTY CITY BUILDING
930 TACOMA AVE
TACOMA, WA 98402

REVISIONS

DATE
6/5/2025
BCRA NO.
23088.00.08
DRAWN BY:
REVIEWED BY:
SHEET TITLE
INDEX SHEET, PROJECT INFORMATION, PROJECT TEAM

bcra
© COPYRIGHT 2025 - BCRA, INC. ALL RIGHTS RESERVED.

SHEET
G-101
PERMIT SET

IF SHEET MEASURES LESS THAN 24"X36", IT IS A REDUCED PRINT. REDUCE SCALE ACCORDINGLY

24x36 4/28/2026 10:32:26 AM

APPLICABLE CODES

2021 INTERNATIONAL BUILDING CODE (IBC), WAC 51-50
2021 INTERNATIONAL EXISTING BUILDING CODE (IEBC)
2021 INTERNATIONAL FIRE CODE (IFC), WAC 51-54A 2021
2017 ICC A117.1

IEBC 301.2 ALTERATION : PRESCRIPTIVE COMPLIANCE METHOD

OCCUPANCY GROUPS

BUSINESS — B - BUSINESS (EXISTING OFFICES)

RENOVATION AREA: 149 SF

TYPE OF CONSTRUCTION:

STORIES: 11 STORIES (NO CHANGE)
BUILDING AREA: TOTAL BUILDING AREA 255,063 SF (NO CHANGE)
CONSTRUCTION TYPE: EXISTING, IIB EQUIVALENT
SPRINKLERED: YES

FIRE RESISTANCE RATING REQUIREMENTS (TABLE 601)

	TYPE II-B
PRIMARY STRUCTURAL FRAME	0 HR
BEARING WALLS (EXTERIOR & INTERIOR)	0 HR
EXTERIOR NON-BEARING	0 HR
INTERIOR NON-BEARING WALL	0 HR
FLOOR CONSTRUCTION	0 HR
ROOF CONSTRUCTION	0 HR

INTERIOR FINISHES:


WALL AND CEILING FINISHES (803) :
EXCERPT FROM IBC TABLE 803.13:
INTERIOR WALL AND CEILING FINISH REQUIREMENTS BY OCCUPANCY

OCCUPANCY: GROUP B (SPRINKLERED)
EXIT ENCLOSURES AND PASSAGEWAY: CLASS B
CORRIDOR: CLASS C
ROOMS AND ENCLOSED SPACES: CLASS C

LIFE SAFETY PLAN LEGEND

* * * * * * * (E) 2-HOUR RATED WALL
⊗ (E) EXIT LIGHT

NOTE: ALTERATION DOES NOT CHANGE OCCUPANT LOADS OR REDUCE EGRESS PATH / EXITS.

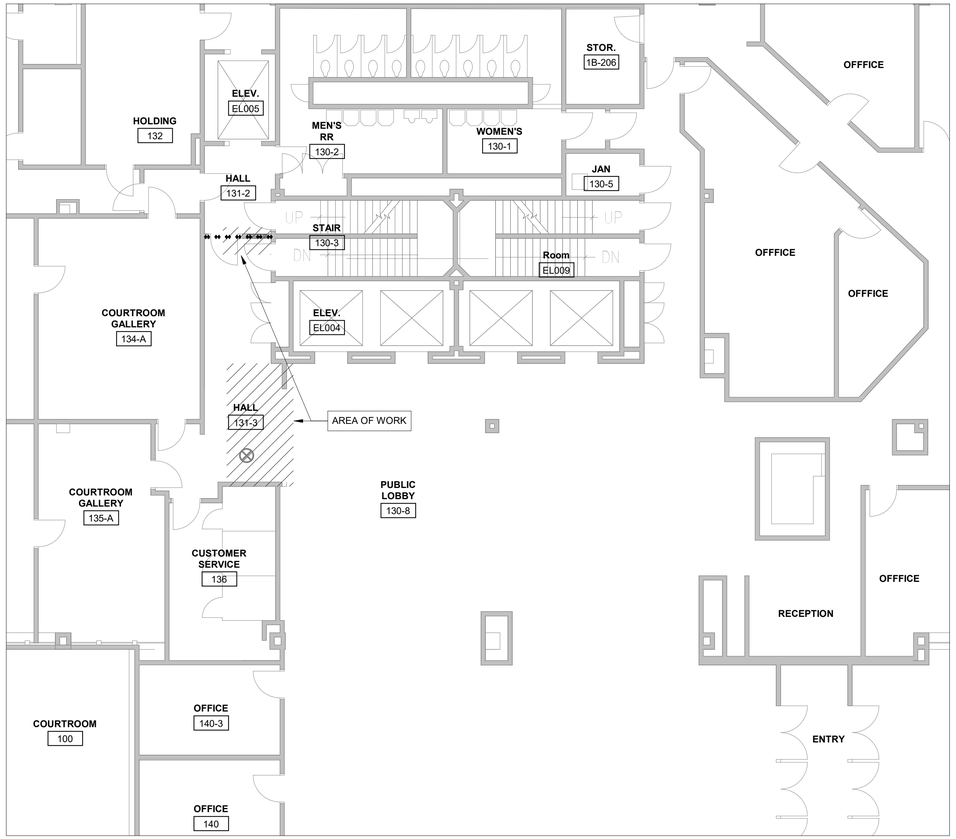

1 PUBLIC LOBBY - 1ST FLOOR ENLARGED PLAN
1/8" = 1'-0"

bcra
T 253.627.4367 F 253.627.4385 WWW.BCRADESIGN.COM
2106 PACIFIC AVENUE, SUITE 300, TACOMA, WA 98402

SEAL
9463 REGISTERED ARCHITECT
JOSEPH PATRICK RYDMAN
STATE OF WASHINGTON

PROJECT
PIERCE COUNTY DEPARTMENT OF FACILITIES MANAGEMENT
COUNTY-CITY BUILDING 1ST FLOOR DOOR WIDENING
COUNTY CITY BUILDING
930 TACOMA AVE
TACOMA, WA 98402

REVISIONS


DATE 6/5/2025
BCRA NO. 23088.00.08
DRAWN BY:
REVIEWED BY:
SHEET TITLE
CODE ANAYLSIS

bcra
© COPYRIGHT 2025 - BCRA, INC. ALL RIGHTS RESERVED

SHEET
G-102
PERMIT SET


IF SHEET MEASURES LESS THAN 24"X36", IT IS A REDUCED PRINT. REDUCE SCALE ACCORDINGLY

24x36 4/23/2026 10:32:26 AM

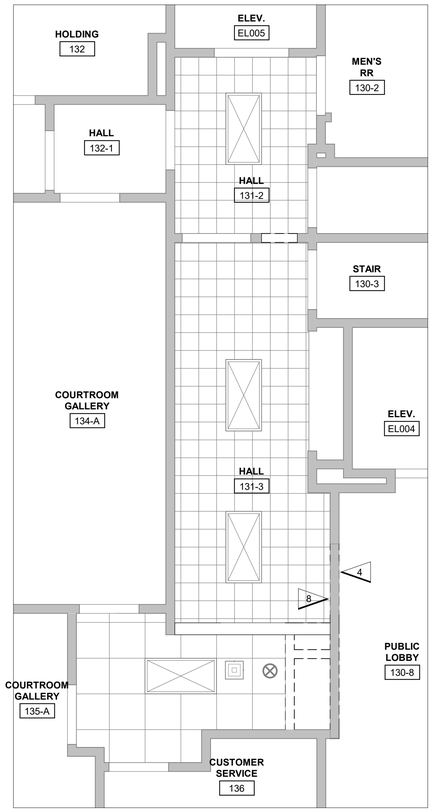

2 DEMOLITION REFLECTED CEILING PLAN

1/4" = 1'-0"

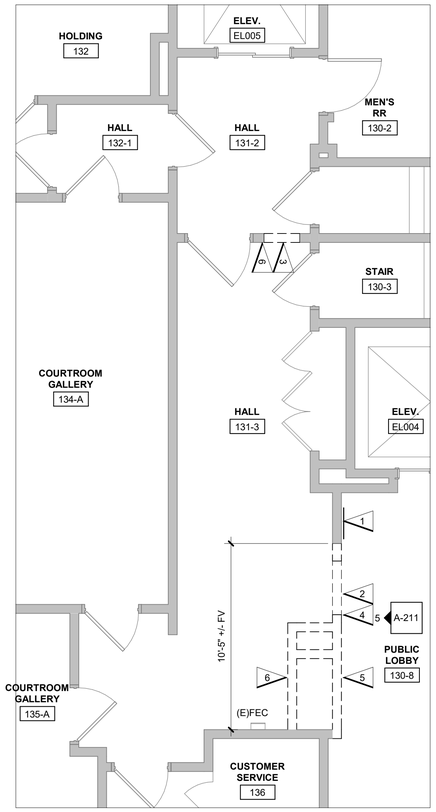

1 DEMOLITION FLOOR PLAN

1/4" = 1'-0"

0 2 4 8

SCALE: 1/4" = 1'-0"

NORTH

DEMOLITION FLOOR PLAN GENERAL NOTES

1. DIMENSIONS OF EXISTING GRIDLINES ARE BASED ON EXISTING DRAWINGS. FIELD VERIFY.
2. FIELD VERIFY EXISTING CONDITIONS PRIOR TO THE START OF DEMOLITION OPERATIONS. BRING ANY DISCREPANCIES WHICH MAY SIGNIFICANTLY AFFECT DEMOLITION OR NEW CONSTRUCTION TO THE ATTENTION OF THE ARCHITECT FOR REVIEW.
3. DO NOT ALTER THE STRUCTURAL INTEGRITY OF THE EXISTING BUILDING OR ITS ASSEMBLIES UNLESS SPECIFICALLY NOTED OTHERWISE.
4. FOR THE PURPOSES OF THESE DEMOLITION DRAWINGS, DEFINITIONS ARE AS FOLLOWS:
   A. **REMOVE** - SELECTIVE REMOVAL OF A DESIGNATED BUILDING ELEMENT IN A MANNER THAT ENSURES THAT SURROUNDING EXISTING BUILDING ELEMENTS (TO REMAIN) ARE PROTECTED FROM DAMAGE. ALL REMOVED ITEMS ARE TO BE DISPOSED OF IN AN APPROPRITE MANNER OFF-SITE.
   B. **SALVAGE** - REMOVAL OF A DESIGNATED BUILDING ELEMENT IN A MANNER THAT PROTECTS THE ITEM BEING REMOVED FOR RE-USE IN THE PROJECT, OR TURNED OVER TO THE OWNER. ITEM IS TO BE STORED BY THE GENERAL CONTRACTOR (FOR RE-USE) OR COORDINATED WITH THE OWNER FOR REMOVAL FROM THE SITE.
5. WHERE EXISTING WALLS AND DOOR FRAMES ARE REMOVED, DISASSEMBLE OR CUT OFF FLUSH ANCHOR BOLTS, CONDUIT, PIPING IN FLOOR AND FILL HOLES W/ CEMENTITIOUS UNDERLAYMENT/GROUT FLUSH W/ FLOOR SURFACE.
6. PROTECT ALL EXISTING STRUCTURE, EQUIPMENT, WALLS, FLOORS, ROOFS AND FINISHES TO REMAIN FROM DAMAGE DURING DEMOLITION. REPAIR AND REPLACE DAMAGED EXISTING CONSTRUCTION.
7. ANY EXISTING CONSTRUCTION OR FINISH ELEMENTS AFFECTED BY THE REMOVAL OF EXISTING BUILDING SYSTEMS SHALL BE PATCHED AND REPAIRED TO MATCH ADJACENT BUILDING FINISHES IN A CONSISTENT MANNER.

DEMOLITION PLAN LEGEND

NOTE: NOT ALL LEGEND ITEMS MAY BE PRESENT ON THIS SHEET

- EXISTING DOOR AND FRAME TO REMAIN
- EXISTING WALL TO REMAIN
- EXISTING OPENING/ DOOR HEAD TO REMAIN
- REMOVE WALL
- EXISTING EXIT SIGN TO BE RELOCATED BY CONTRACTOR, SEE 2/A-121 (1)
- EXISTING CEILING DIFFUSER TO REMAIN
- EXISTING LIGHT FIXTURE TO REMAIN
- EXISTING ACOUSTIC CEILING TILE TO REMAIN (2'x2')
- EXISTING GLUE-ON ACOUSTIC CEILING TILE TO REMAIN (1'x1')
- (E)FEC — EXISTING FIRE EXTINGUISHER IN CABINET TO REMAIN

DEMOLITION FLOOR PLAN SHEET NOTES

1. EXISTING ELEVATOR PANEL TO REMAIN.
2. REMOVE EXISTING STAINLESS STEEL TRIM AT EXISTING OPENING.
3. REMOVE PORTION OF WALL FOR INSTALLATION OF RELITE AND FRAMING.
4. SALVAGE (E) GRANITE WALL PANELS
5. REMOVE (E) HVAC SENSOR. CUT AND CAP PNEUMATIC LINES, LOCATE UNDER (E) CONCRETE FLOOR SLAB. PATCH CONCRETE FLOOR SLAB.
6. SALVAGE (E) SIGN. CONTRACTOR TO REINSTALL SIGN, LOCATION TO BE DETERMINED BY OWNER AT A LATER DATE.
7. NOT USED
8. REMOVE (E) GWB FOR INSTALLATION OF FRAMING. (1)

bcra
T 253.627.4367 F 253.627.4385 WWW.BCRADESIGN.COM
2106 PACIFIC AVENUE, SUITE 300, TACOMA, WA 98402

SEAL
9463 REGISTERED ARCHITECT
JOSEPH PATRICK RYDMAN
STATE OF WASHINGTON

PROJECT
PIERCE COUNTY DEPARTMENT OF FACILITIES MANAGEMENT
COUNTY-CITY BUILDING 1ST FLOOR DOOR WIDENING
COUNTY CITY BUILDING
930 TACOMA AVE
TACOMA, WA 98402

REVISIONS
1	BID SET REVISION	4/23/26

DATE
6/5/2025
BCRA NO.
23088.00.08
DRAWN BY:
REVIEWED BY:
SHEET TITLE
DEMOLITION FLOOR PLAN & DEMOLITION REFLECTED CEILING PLAN

bcra
© COPYRIGHT 2025 - BCRA, INC. ALL RIGHTS RESERVED
SHEET
AD121
PERMIT SET

24-06 4/23/2026 10:32:27 AM

IF SHEET MEASURES LESS THAN 24"X36", IT IS A REDUCED PRINT. REDUCE SCALE ACCORDINGLY

FLOOR PLAN GENERAL NOTES

1. REFER TO INTERIOR ELEVATIONS FOR WALL FINISHES.

FLOOR PLAN LEGEND


- EXISTING DOOR TO REMAIN
- EXISTING WALL TO REMAIN
- RELITE / WINDOW
- INTERIOR FRAMED WALL - STOP WALL AT 6" ABOVE HIGHEST CEILING UNLESS NOTED OTHERWISE - BRACE TO STRUCTURE ABOVE AS SHOWN ON A-521.
- WALL-MOUNTED ITEM - REFER TO INTERIOR ELEVATIONS
- (E)FEC — EXISTING FIRE EXTINGUISHER IN CABINET TO REMAIN

REFLECTED CEILING PLAN LEGEND

- EXISTING DOOR/OPENING TO REMAIN
- EXISTING WALL TO REMAIN
- RELITE AS SCHEDULED
- EXISTING ACOUSTIC CEILING TILE TO REMAIN (2'x2')
- ACOUSTIC CEILING TILE - MATCH EXISTING (2'x2'), FV
- EXISTING GLUE-ON ACOUSTIC CEILING TILE TO REMAIN (1'x1')
- EXISTING LIGHT FIXTURE TO REMAIN
- EXISTING CEILING DIFFUSER TO REMAIN
- EXIT SIGN


FLOOR PLAN SHEET NOTES

1. EXISTING ELEVATOR PANEL TO REMAIN.
2. NOT USED
3. REINSTALL (E) MEN'S RR SIGN
4. PATCH FLOOR WITH MATCHING FLOOR TILE FROM EXISTING STOCK. FLOOR TILE OFCI. FLOOR PREPARATION AND ADHESIVE BY CONTRACTOR.

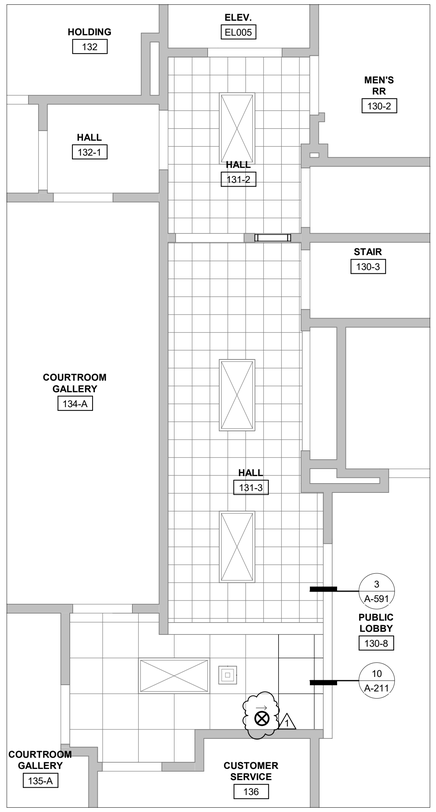

2 REFLECTED CEILING PLAN

1/4" = 1'-0"

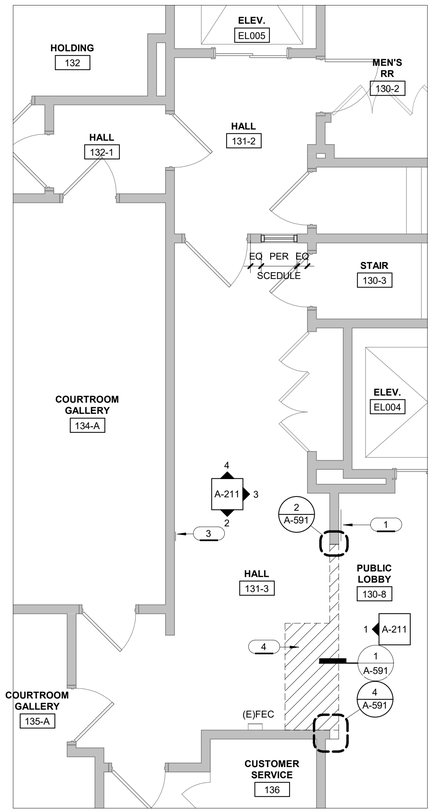

1 FLOOR PLAN

1/4" = 1'-0"

0 2 4 8

SCALE: 1/4" = 1'-0"

NORTH

bcra
T 253.627.4367 F 253.627.4385 WWW.BCRADESIGN.COM
2106 PACIFIC AVENUE, SUITE 300, TACOMA, WA 98402

SEAL

9463 REGISTERED ARCHITECT
JOSEPH PATRICK RYDMAN
STATE OF WASHINGTON

PROJECT
PIERCE COUNTY DEPARTMENT OF FACILITIES MANAGEMENT
COUNTY-CITY BUILDING
1ST FLOOR DOOR WIDENING
COUNTY CITY BUILDING
930 TACOMA AVE
TACOMA, WA 98402

REVISIONS

1	BID SET REVISION	4/23/26

DATE
6/5/2025
BCRA NO.
23088.00.08
DRAWN BY:
REVIEWED BY:
SHEET TITLE
FIRST FLOOR PLAN, FIRST FLOOR REFLECTED CEILING PLAN


bcra

© COPYRIGHT 2025 - BCRA, INC. ALL RIGHTS RESERVED


SHEET
A-121
PERMIT SET

24-06 4/23/2026 10:32:27 AM


IF SHEET MEASURES LESS THAN 24"X36", IT IS A REDUCED PRINT. REDUCE SCALE ACCORDINGLY

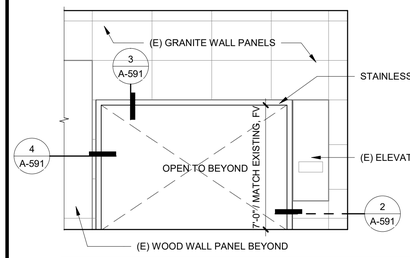


1 PUBLIC LOBBY - WEST
1/4" = 1'-0"

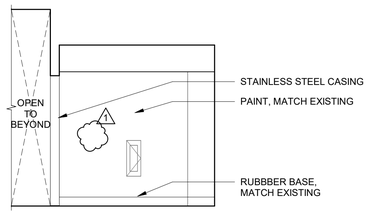


2 HALL 131-3 - SOUTH
1/4" = 1'-0"

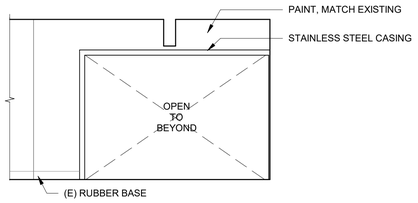


3 HALL 131-3 - EAST
1/4" = 1'-0"

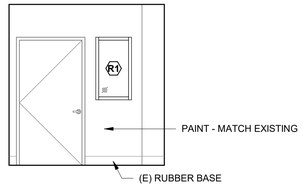

4 HALL 131-3 N
1/4" = 1'-0"

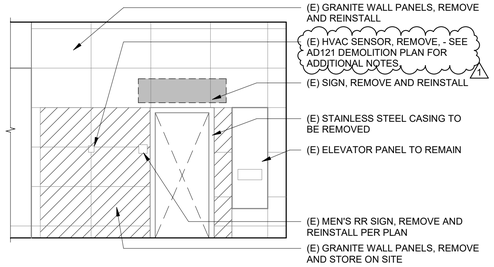

5 PUBLIC LOBBY - WEST - DEMOLITION
1/4" = 1'-0"




FRAME: HOLLOW METAL
FINISH: PAINT
GLAZING: GL-1
SHADING: NONE


GL1: SINGLE PANE OF CLEAR 90 MINUTE FIRE RATED LAMINATED SAFETY GLASS

NOTE: FRAME FINISH TO MATCH FINISH AT EXISTING DOOR FRAME VERIFY COLOR W/ OWNER.


6 RELITE TYPES
1/4" = 1'-0"

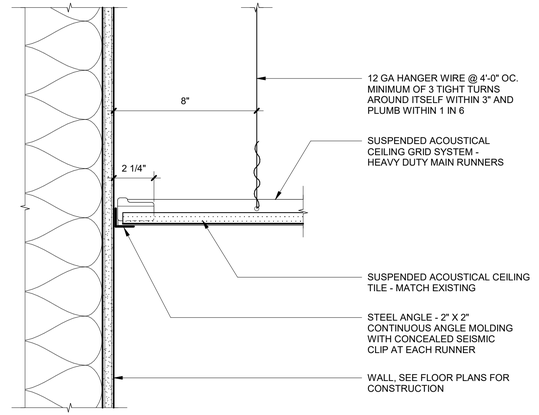


10 SUSPENDED ACT CEILING PERIMETER
3" = 1'-0"

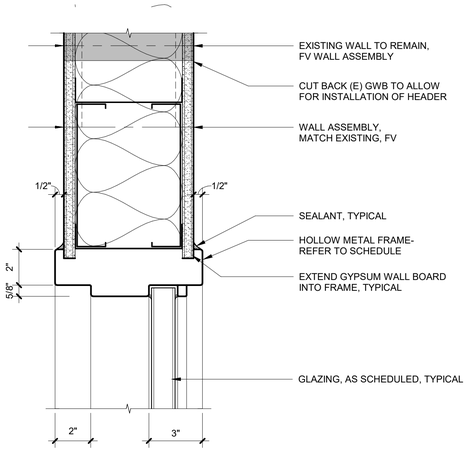

8 HM RELITE HEAD
3" = 1'-0"

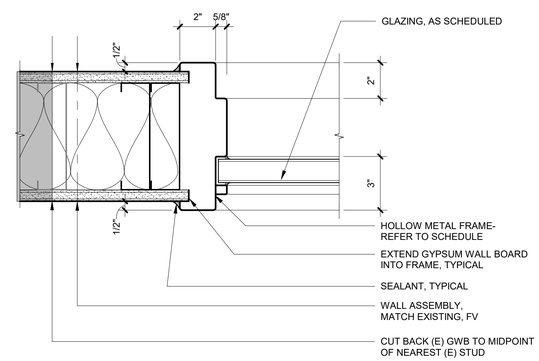

9 HOLLOW METAL RELITE JAMB
3" = 1'-0"

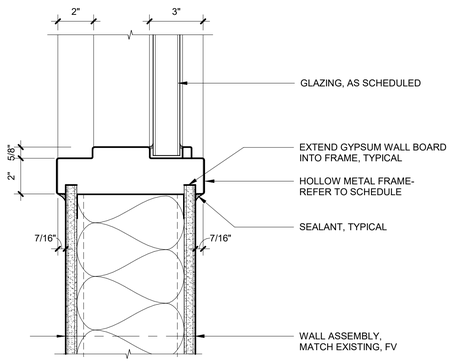

7 HOLLOW METAL RELITE SILL
3" = 1'-0"

bcra
T 253.627.4367 F 253.627.4385 WWW.BCRADESIGN.COM
2106 PACIFIC AVENUE, SUITE 300, TACOMA, WA 98402

SEAL
9463
REGISTERED ARCHITECT
JOSEPH PATRICK RYDMAN
STATE OF WASHINGTON

PROJECT
PIERCE COUNTY DEPARTMENT OF FACILITIES MANAGEMENT
COUNTY-CITY BUILDING 1ST FLOOR DOOR WIDENING
COUNTY CITY BUILDING
930 TACOMA AVE
TACOMA, WA 98402

REVISIONS
1 BID SET REVISION 4/23/26

DATE
6/5/2025
BCRA NO.
23088.00.08
DRAWN BY:
REVIEWED BY:
SHEET TITLE
INTERIOR ELEVATIONS, RELITE SCHEDULE, DETAILS


bcra
© COPYRIGHT 2025 - BCRA, INC. ALL RIGHTS RESERVED
SHEET

A-211


PERMIT SET

24x36 4/23/2026 10:32:29 AM


IF SHEET MEASURES LESS THAN 24"X36", IT IS A REDUCED PRINT. REDUCE SCALE ACCORDINGLY

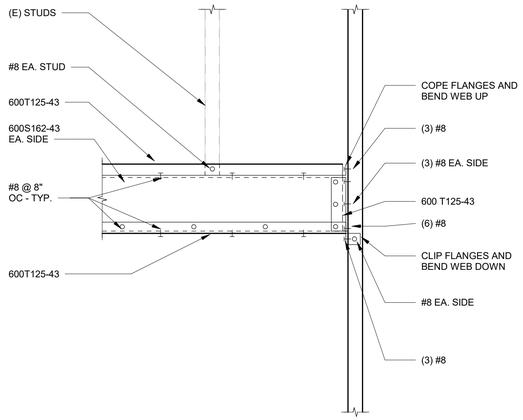


6 HEADER DETAIL
1 1/2" = 1'-0"

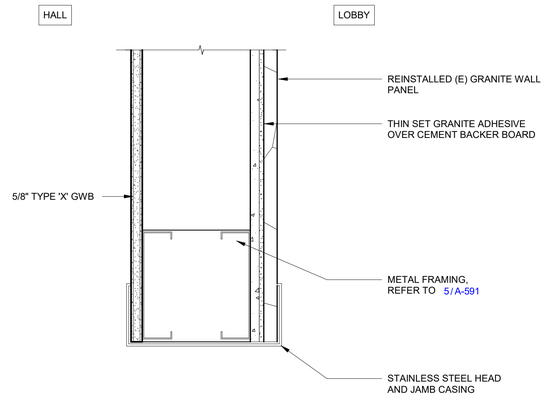


3 HEADER DETAIL
3" = 1'-0"

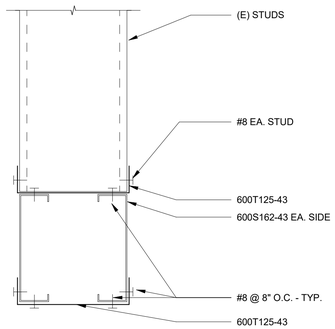

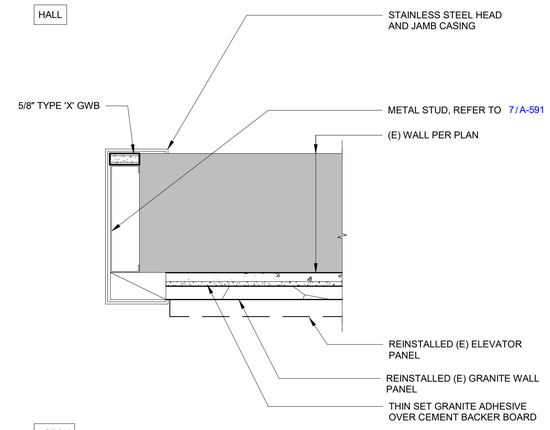


5 HEADER DETAIL
3" = 1'-0"


2 JAMB DETAIL - NORTH
3" = 1'-0"

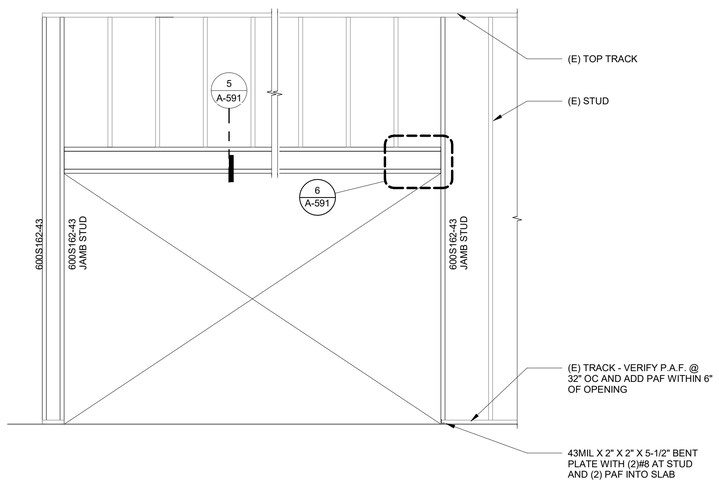

7 FRAMING ELEVATION
1/2" = 1'-0"

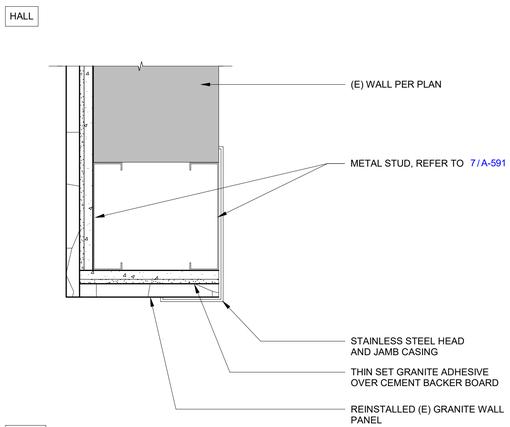

4 JAMB DETAIL - SOUTH
3" = 1'-0"

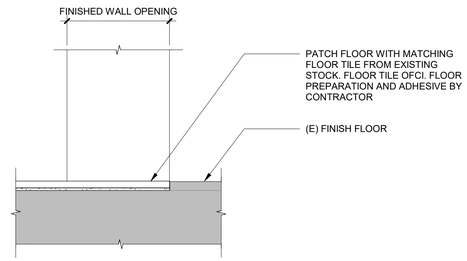

1 THRESHOLD AT OPENING
3" = 1'-0"

bcra
T 253.627.4367 F 253.627.4385 WWW.BCRADESIGN.COM
2106 PACIFIC AVENUE, SUITE 300, TACOMA, WA 98402

SEAL
9463
REGISTERED ARCHITECT
JOSEPH PATRICK RYDMAN
STATE OF WASHINGTON

PROJECT
PIERCE COUNTY DEPARTMENT OF FACILITIES MANAGEMENT
COUNTY-CITY BUILDING
1ST FLOOR DOOR WIDENING
COUNTY CITY BUILDING
930 TACOMA AVE
TACOMA, WA 98402

REVISIONS

DATE
6/5/2025
BCRA NO.
23088.00.08
DRAWN BY:
REVIEWED BY:
SHEET TITLE
DETAILS

bcra
© COPYRIGHT 2025 - BCRA, INC. ALL RIGHTS RESERVED
SHEET

A-591

PERMIT SET

24x36 4/23/2026 10:33:36 AM

IF SHEET MEASURES LESS THAN 24"X36", IT IS A REDUCED PRINT. REDUCE SCALE ACCORDINGLY